




**COOL SOLUTIONS  
FOR PROFESSIONALS**



**Tubs 360x165**



**Tubs 360x250**



TECHNICAL DATA	AGF0072 E
Nominal Depth mm	910
Capacity L.	740
Dimensions WxDxH	740x910x2070
Light door WxH	620x1474
Inner depth	730
Depth with 90° door	1600
Climatic class	T
<b>Operating temperature °C</b>	<b>-30/-12</b>
Refrigerant	R404
Refrigeration capacity W	572* 848**
Electric power supply V/~/Hz	230/1/50
<b>Max. power W</b>	<b>955</b>
<b>Max. absorbed current A</b>	<b>4,5</b>
Refrigeration system	VENTILATED AIR FORCED
Internal fittings shelves	5 x (600x660)
Interstep	35 - 50
Standing	38 - 26
Packing dimensions	780x940x2200
Packing volume	1,57
Net weight kg	180
Gross weight kg	210
(*) Temp.evap. -10°C, Temp. cond. +45°C	
(**) Temp.evap. +7,2°C, Temp.cond. +54.4°C	

# AGF0072E

HIGH-END FREEZER FOR GELATO

Up to **60 tubs** 360x165x120

Up to **40 tubs** 360x250x120

## AGF0072E AIR

STANDARD EQUIPPED WITH 5 STAINLESS STEEL 600x660  
SHELVES AND 5 PAIR OF STAINLESS STEEL RUNNERS

<b>Extra pair "C" runners</b>	FPCG67I
<b>Extra stainless steel shelves</b>	RLI67G
<b>Castors kit</b>	BN219901

### GENERAL FEATURES

- Stainless steel aisi304 framework construction
- Scotch brite external finish
- 60 mm insulation (high density 40 Kg/mc, CFC and HCFC free)
- Monocoque structure
- Door frame with replaceable electric resistance
- Magnetic gaskets replaceable without tools
- Automatic self-closing REVERSIBLE door(s)
- Front hinges for installation on concrete plinths
- Adjustable stainless steel feet
- Lock standard

### INTERNAL SET-UP

- Internal compartment designed to accomodate 600x660 shelves
- Rouded corners for better cleaning
- Stainless steel tray supports with pierced diamond pattern to adjust trays' height every 3,5 or 5 cm
- Std equipped with 5 stainless steel "C" pair of guides and 5 stainless steel trays

### REFRIGERANT UNIT

- Indirect ventilated air circulation system with flow conveyor to ensure temperature uniformity and perfect product preservation
- Automatic ventilation stop when opening doors, controlled by micro-switch on each door
- Intelligent defrosting: only when needed, electric on AG-F0082 or with hot gas on AGF0072
- Refrigerant R404A
- MONOBLOCK cooling system: all in one block above the cabinet to save internal space and ease maintenance
- Quick temperature recovery (to compensate with frequent door openings)
- capillar on AGF0072
- Evaporator with anticorrosion cataphoresis treatment
- Climatic class T (43°C ambient temperature)

### COMMANDS, CONTROLS AND SAFETY DEVICES

- Haccp electronic control board

### OPTIONS / ACCESSORIES


- Castors available on request
- Available also with water cooled unit




COOL SOLUTIONS  
FOR PROFESSIONALS

# CAPACITY IN GELATO TUBS


In AGF0072 - AGF0082

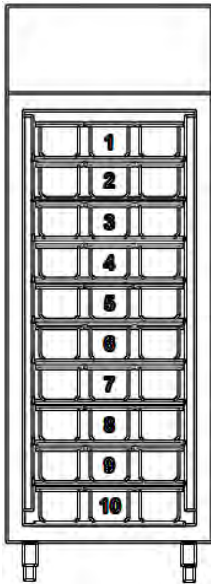


CONTAINERS  
h. 12

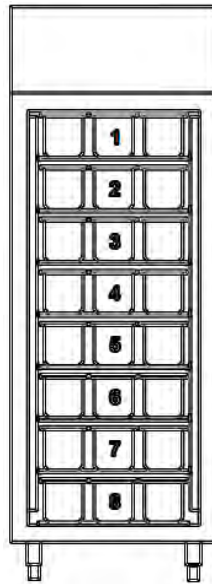


CONTAINERS  
h. 15

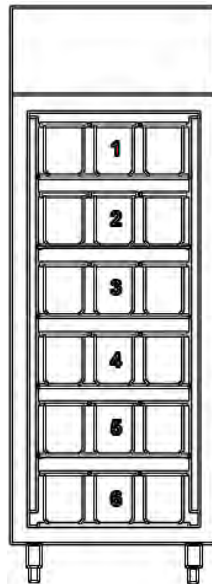


CONTAINERS  
h. 18




CONTAINERS  
360x165

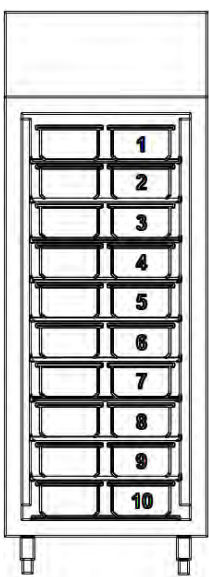


CONTAINERS  
h. 12

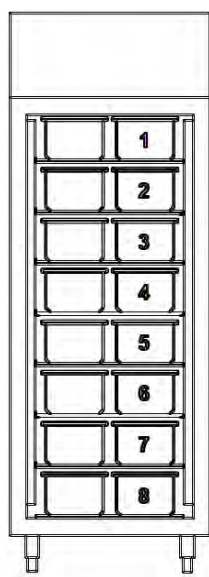

CONTAINERS  
h. 15

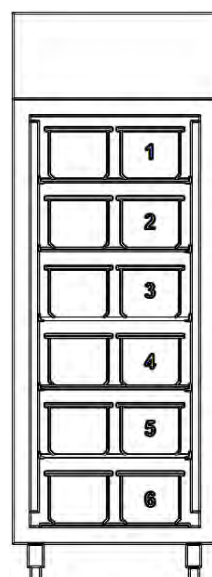

CONTAINERS  
h. 18



CONTAINERS  
360x250