




**COOL SOLUTIONS
FOR PROFESSIONALS**



Tubs 360x165



Tubs 360x250



TECHNICAL DATA	AGF0082
Nominal Depth mm	1010
Capacity L.	820
Dimensions WxDxH	740x1010x2070
Light door WxH	620x1474
Inner depth	830
Depth with 90° door	1700
Climatic class	T
Operating temperature	-30/-5
Refrigerant	R404
Refrigeration capacity W	875* 1480**
Electric power supply V~/Hz	230/1/50
Max. power W	1300
Max. absorbed current A	8,5
Refrigeration system	VENTILATED AIR FORCED
Internal fittings shelves	5 x (600x800)
Interstep	35 - 50
Standing	38 - 26
Packing dimensions	780x1050x2200
Packing volume	1,96
Net weight kg	205
Gross weight	240
(*) Temp.evap. -10°C, Temp. cond. +45°C	
(**) Temp.evap. +7,2°C, Temp.cond. +54.4°C	

AGF0082

HIGH-END FREEZER FOR GELATO

Up to **60 tubs** 360x165x120

Up to **40 tubs** 360x250x120

AGF0082 AIR

STANDARD EQUIPPED WITH 5 STAINLESS STEEL SHELVES
600X800 AND 5 PAIR OF STAINLESS STEEL RUNNERS

Extra pair "C" runners	FPCG64I
Extra stainless steel shelves	RFI68P
Castors kit	BN219901

GENERAL FEATURES

- Stainless steel aisi304 framework construction
- Scotch brite external finish
- 60 mm insulation (high density 40 Kg/mc, CFC and HCFC free)
- Monocoque structure
- Door frame with replaceable electric resistance
- Magnetic gaskets replaceable without tools
- Automatic self-closing REVERSIBLE door(s)
- Front hinges for installation on concrete plinths
- Adjustable stainless steel feet
- Lock standard
- Lighting standard

INTERNAL SET-UP

- Internal compartment designed to accomodate 600x800 shelves
- Rouded corners for better cleaning
- Stainless steel tray supports with pierced diamond pattern to adjust trays' height every 3,5 or 5 cm
- Std equipped with 5 stainless steel "C" pair of runners and 5 stainless steel trays

REFRIGERANT UNIT

- Indirect ventilated air circulation system with flow conveyor to ensure temperature uniformity and perfect product preservation
- Automatic ventilation stop when opening doors, controlled by micro-switch on each door
- Intelligent defrosting: only when needed, electric on AGF0082 or with hot gas on AGF0072
- Refrigerant R404A
- MONOBLOCK cooling system: all in one block above the cabinet to save internal space and ease maintenance
- Quick temperature recovery (to compensate with frequent door openings)
- Expansion valve
- Evaporator with anticorrosion cataphoresis treatment
- Climatic class T (43°C ambient temperature)

COMMANDS, CONTROLS AND SAFETY DEVICES

- Haccp electronic control board

OPTIONS / ACCESSORIES


- Castors available on request
- Available also with water cooled unit




COOL SOLUTIONS
FOR PROFESSIONALS

CAPACITY IN GELATO TUBS


In AGF0072 - AGF0082

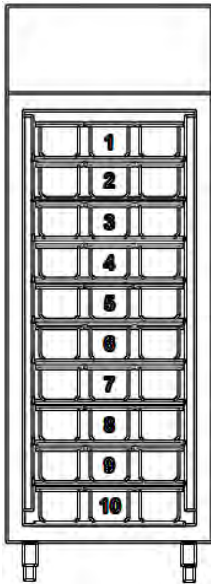


CONTAINERS
h. 12

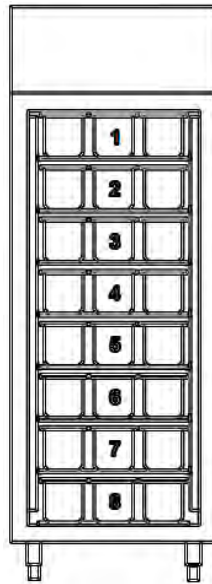


CONTAINERS
h. 15

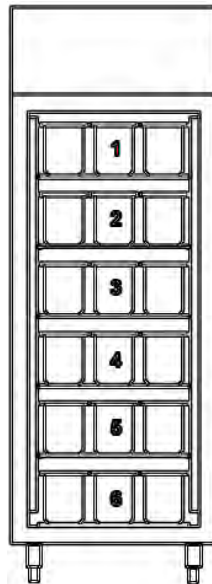


CONTAINERS
h. 18




CONTAINERS
360x165

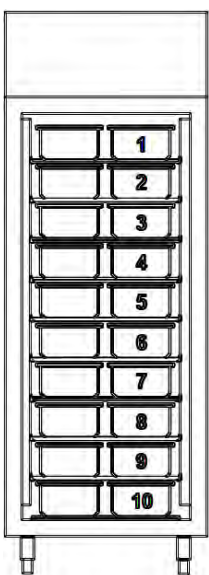


CONTAINERS
h. 12

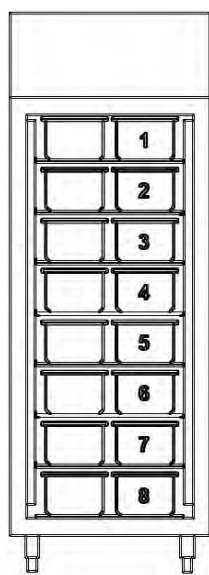

CONTAINERS
h. 15

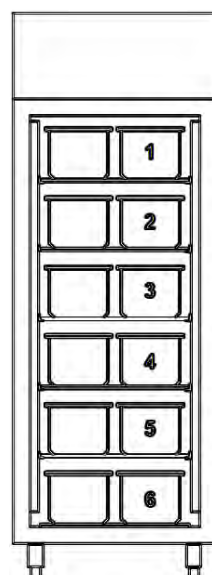

CONTAINERS
h. 18



CONTAINERS
360x250